





-FOR SMART MICRO ENERGY

Vertical industry integration chain

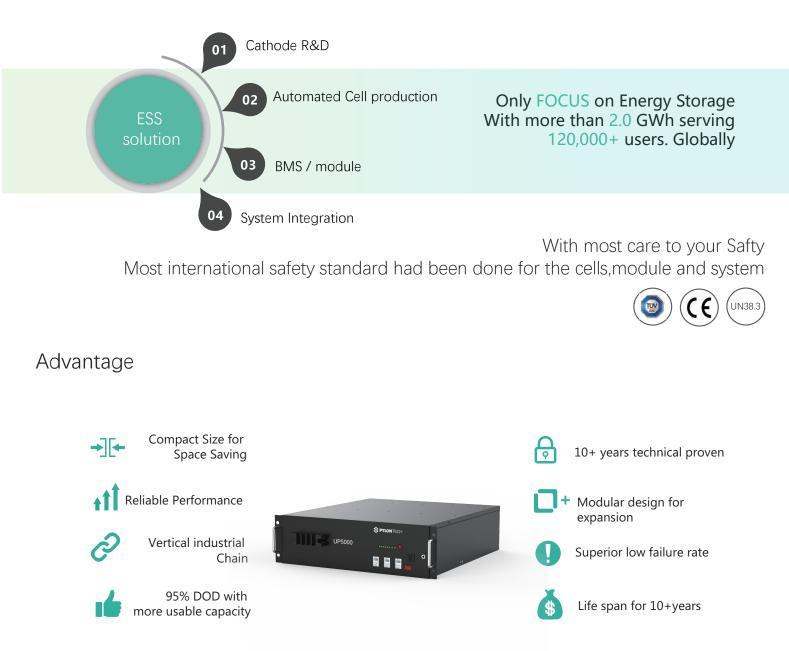

Why need battery storage system?

High-efficiency for your power distribution Cut and save your electricity bills

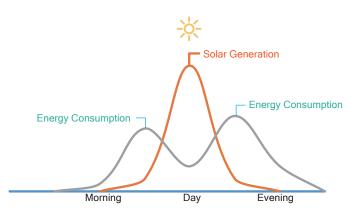



Electricity power occupies more than half of increasing energy consumption in this decade, DER (distributed energy resources) is crucial today during the COVID-19 pandemic while the conventional grid is less reliable because of the less manpower available.

Realize your grid Independence

Keep your grid avaible during terrible whether or extreme situation



Specification

•		S PYLONTECH	
	UP5000		
4		888-	

Specification	Basic Parameters	UP5000	
Nominal	Nominal Voltage (V)	48	
Nomina	Nominal Capacity (Wh)	4,800	
	Ussable Capacity(Wh)	4,560	
Physical	Dimension (mm)	442*420*165	
Filysical	Weight (Kg)	40	
	Discharge Voltage (Vdc)	44.5	
	Charge Voltage (Vdc)	52.5 ~ 53.5	
Electrical		50 (Recommend)	
	Charge/ Discharge Current (Amps)	50 (Max)	
		200 (Peak@15s)	
	Communication Port	RS485,CAN	
	Single string quantity(pcs)	16	
	Working Temperature/°C	0~50 Charge	
		-10~50 Discharge	
Others	Shelf Temperature/℃	-20~60	
Others	Altitude (M)	< 2000	
	IP rating	IP20	
	Humidity (RH)	5~95%	
	Certification	IEC62619/CE/ UN38.3	
	Design life	10+ Years (25℃/77°F)	
	Cycle Life	>6,000 (25℃)	

